Series 2, Integrated Design Hood, 90 cm, Black
DBB93BC60A



- **Maximum storage space**: The T-shaped design offers lots of space and up to 20kg load capacity.
- **Easy and versatile installation**: Easy one-person installation with many flexible layout options.
- **Fingerprint resistant design**: Carbon black finish with reduced fingerprint visibility.
- **Metal grease filters**: Easy to clean, dishwasher safe design for fresher kitchen air.
- **LED lighting**: Energy-efficient, bright, even cooktop illumination.

DWZ1IB1I6	Long-life Clean Air recirculation kit
DWZ1IB6K2	Chimney extension 450-854 mm
DWZ1IB6N2	Chimney extension 187-360 mm

Typology:	Built-in/Built-under
Length electrical supply cord:	130 cm
Required niche size for installation (HxWxD):	340 x 860.0 x 300 mm
Height of the chimney:	GENERAL.N_A mm
Height of product, without chimney:	60 mm
Minimum distance above an electric cooktop:	600 mm
Minimum distance above a gas cooktop:	650 mm
Net weight:	8.3 kg
Type of control:	mechanical
Number of power settings:	3
Max. air extraction:	384 m^3/h
Max. air recirculation:	291 m^3/h
Number of lights:	2
Noise level:	65 dB(A) re 1 pW
Diameter of air outlet:	150 mm
Grease filter material:	Washable stainless steel
EAN code:	4242005530304
Connection rating:	100 W
Fuse protection:	GENERAL.N_A A
Voltage:	220-240 V
Frequency:	50 Hz
Plug type:	Standard 10 Amp plug
Installation type:	Built-in

4 242005 530304

Series 2, Integrated Design Hood, 90 cm, Black
DBB93BC60A

Design:
- Installation in a upper kitchen cabinet
- Flush-fitted installation for a seamless integration in upper kitchen cabinets
- Clever Storage Solution: rangehood can hold up to 10 kg on each side
- Suitable for ducted or recirculated extraction

Features:
- 2 x LED 1.5W lights
- Colour Temperature: 3500 K
- Light Intensity: 290 lux
- 2 metal grease filter(s)

Comfort Features:
- Kitchen cabinet protection: additional side and rear protection against steam and vapour
- Push button controls for power and light
- 3 power settings

Cleaning Comfort:
- Easy to clean smooth surfaces and materials
- Metal grease filter dishwasher-safe
- Coated surfaces to reduce fingerprints

Exhaust/Ducted Mode:
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode:
- Speed 1: extraction rate 174 m3/h; noise level 49 dB(A) re1pW
- Speed 2: extraction rate 246 m3/h; noise level 57 dB(A) re1pW
- Speed 3: extraction rate 384 m3/h; noise level 65 dB (A) re1pW


Recirculation Mode:
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with Long-life Clean Air recirculation kit (available as optional accessory):
- Speed 1: extraction rate 140 m3/h; noise level 49 dB(A) re1pW
- Speed 2: extraction rate 212 m3/h; noise level 59 dB(A) re1pW
- Speed 3: extraction rate 291 m3/h; noise level 66 dB (A) re1pW
- Available Long-life Clean Air odour filter with extended lifetime up to 4 times

Technical Information:
- Consumption data:
- Power rating: 100 W
- Voltage: 220 - 240 V
- Sustainability:
- Made in Germany: produced at a CO2 neutral production site


Planning and Installation Information:
- Install into a 90cm wide upper kitchen cabinet
- Integrated Design Rangehood comfort installation: easy one -person installation system
- Appliance dimensions (HxWxD): 340 x 898 x 298 mm
- Built-in dimensions (HxWxD): min. 340 mm x 860 mm x min. 300 mm
- Enclosed spacers for installation in upper kitchen cabinets with maximum depth of up to 360 mm
- For installation in higher kitchen cabinets chimney extensions are available as optional accessories
- Diameter pipe Ø 150 mm
- Electrical cable length 1.3 m

Series 2, Integrated Design Hood, 90 cm, Black
DBB93BC60A

Measurements in mm
Side view

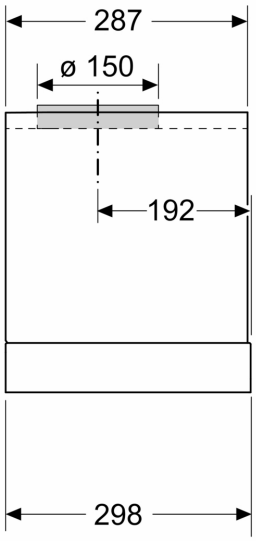


Measurements in mm
View from above

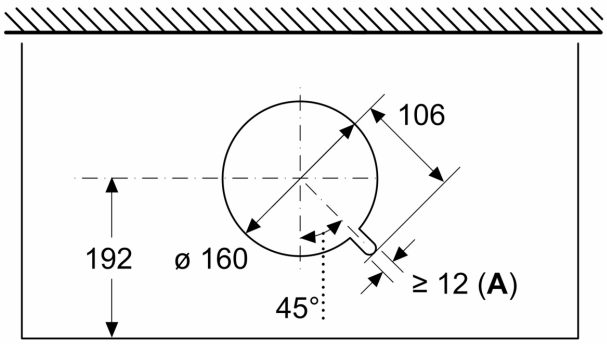

A: Cable bushing

Measurements in mm

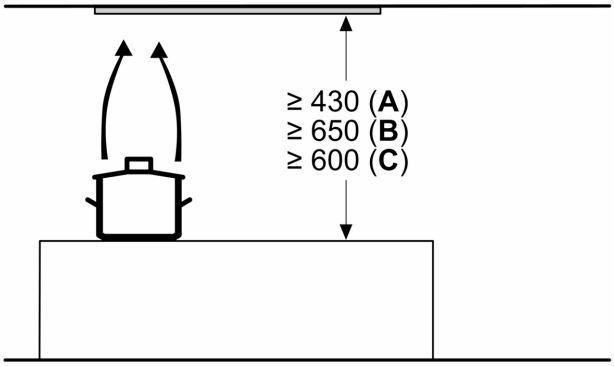


A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand


Measurements in mm
Installation example with spice rack

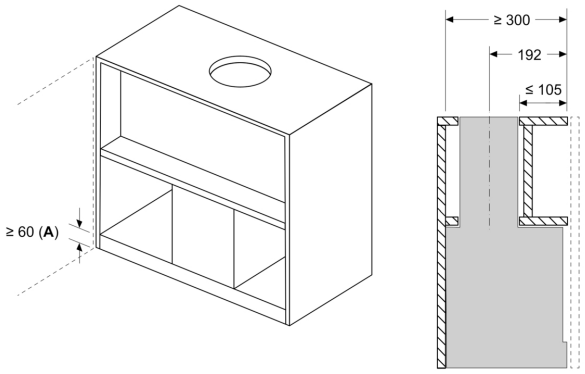

A: Area without hinges

Installation example in cupboards with crossbar, if installation with chimney extension (other accessories) not possible


Measurements in mm
Installation requirements for replacement business




A: Area without hinges

Installation requirements for replacing existing built-in hood solutions with integrated design hood without replacing the cupboard

Measurements in mm
Front view

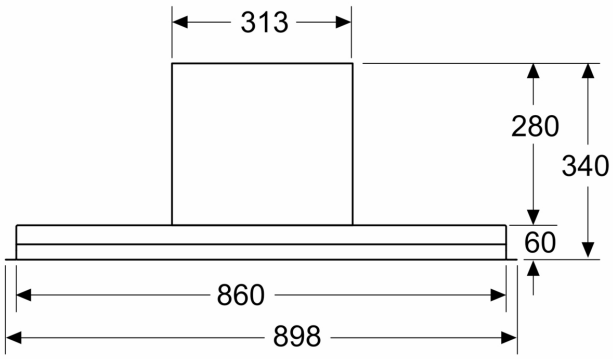


Measurements in mm
Installation example

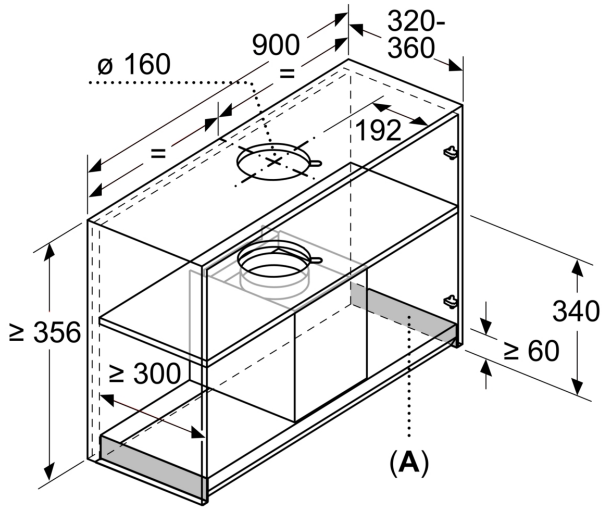


A: Area without hinges

Measurements in mm
Installation example in furniture cut-out

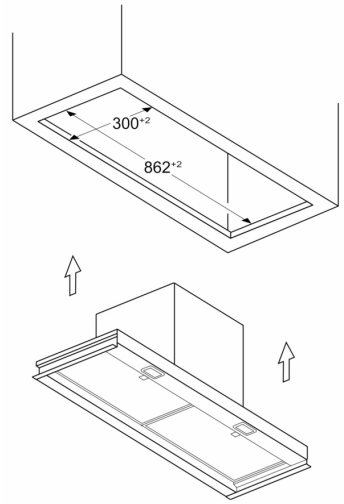

Measurements in mm

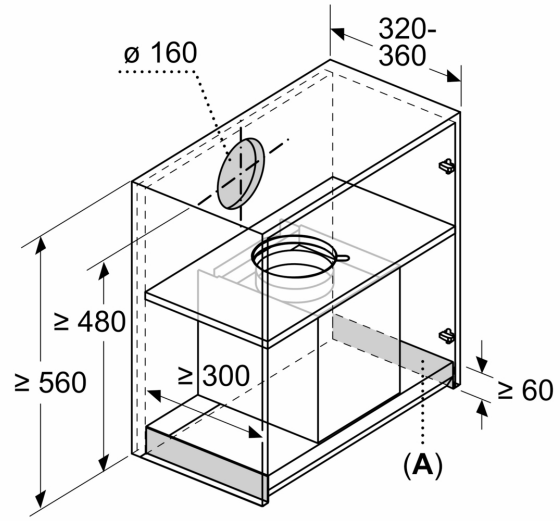

A: Area without hinges