N 70, INTEGRATED RANGEHOOD, 86 CM, STAINLESS STEEL
D58ML66N1A



Efficient Silent Drive

Z5135X3	Standard recirculation kit

- √ Efficient Drive Motor – Quiet and energy-efficient motor for a calmer kitchen.
- √ Intensive Speed Setting: Automatically boosts extraction when cooking steam becomes intense.
- √ Dimmer Function: Easily dim the light according to your mood with the touch of a finger.

Typology:	Built-in/Built-under
Length electrical supply cord:	150 cm
Required niche size for installation (HxWxD):	418mm x 836.0mm x 264mm mm
Minimum distance above an electric cooktop:	600 mm
Minimum distance above a gas cooktop:	650 mm
Net weight:	9.6 kg
Type of control:	Electronic
Number of power settings:	3-stages + intensive setting
Maximum output air extraction:	610 m³/h
Boost position output recirculating:	727 m³/h
Maximum output recirculating air:	563 m³/h
Boost position air extraction:	800 m³/h
Number of lights:	2
Noise level:	64 dB(A) re 1pW
Diameter of air outlet:	120 / 150 mm
Grease filter material:	Washable aluminium
EAN code:	4242004273547
Connection Rating:	172 W
Fuse protection:	3 A
Voltage:	220-240 V
Frequency:	50 Hz
Plug type:	AU plug
Installation type:	Built-in

4 242004 273547

N 70, INTEGRATED RANGEHOOD, 86 CM, STAINLESS STEEL
D58ML66N1A

Design and Innovation
- For installation in a kitchen cabinet
- Appliance colour: brushed steel
- Rim ventilation
- Metal grease filters with stainless steel cover


Size & Power
- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 610 m³/h. Intensive 800 m³/h
- Noise level according to EN 60704-3 exhaust air:
- Max. normal use: 64dB(A) re 1 pW
- Intensive: 70 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as accessory) your appliances reaches:
- Extraction rate in recirculation mode:
- Max. normal use: 563m³/h
- Intensive: 727m³/h
- Noise level in recirculation mode:
- Max. normal use: 71dB(A) re 1 pW
- Intensive: 77 dB(A) re 1 pW

Features
- Electronic controls
- Push button controls (3 power levels plus intensive setting) with LED display
- Suitable for ducted or recirculated extraction
- Accessories required for recirculated extraction: Recirculating kit
- Automatic intensive revert setting - 6 min
- EfficientDrive BLDC technology


Convenience
- 2 x 1 Watt LED lights
- Light Intensity: 266 lux
- Colour Temperature: 4000 K
- Dishwasher safe Metal grease filters
- Saturation indicator for grease filters

Technical Information
- Appliance dimensions (HxWxD): 418 x 860 x 300 mm
- Built-in dimensions: width: 84 cm, depth: 26 cm
- 120 or 150 mm tube connection diameter
- Electrical cable length 1.5 m
- Power rating: 172 W
- with one-way flap: prevents outside air from entering your kitchen


N 70, INTEGRATED RANGEHOOD, 86 CM, STAINLESS STEEL
D58ML66N1A

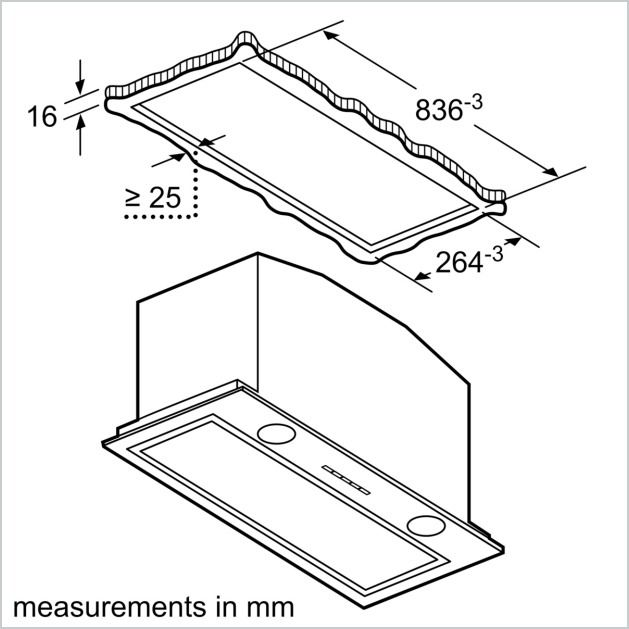

measurements in mm

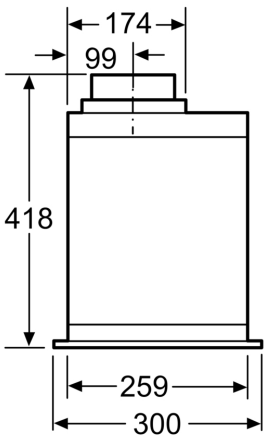

measurements in mm

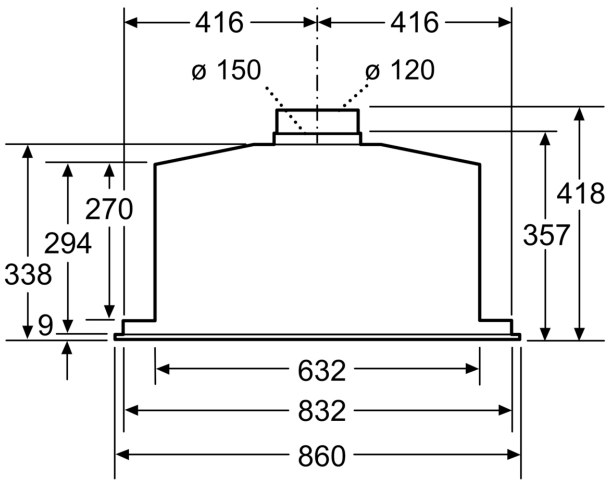

measurements in mm