



UM1170-6S, UM1170-9S, UM1170-12S // 60cm, 90cm & 120cm // SILENT



// UM1170-9S (90cm)



Perfectly designed for discreet mounting inside overhead cabinets, the popular UM1170 fits perfectly into your kitchen cupboards and is ideal for when space is limited, or where the rangehood needs to be out of sight.

Convenient stainless steel push button controls operate the 5 speed settings, LED lighting and 15 minute delay timer with auto shut-off, while dishwasher-safe mesh filters offer easy maintenance.

PRODUCT DESCRIPTION

- stainless steel finish
- silent Isodrive® motor system
- soft-touch controls, digital display
- 5 x speed levels
- 15 minute delay timer with auto shut-off
- 2 x LED lights
- stainless steel, dishwasher safe filters
- 5 Year Warranty on Canopy

ISODRIVE® OPTIONS

- **ST** single external motor
 - 900 m³/h airflow
 - 200mm SteelFlex™ ducting (4m)
 - install roof/wall
 - rated power: 57W
- **SP** single external motor
 - 1600 m³/h airflow
 - 200mm SteelFlex™ ducting (6m)
 - install roof/wall

NOISE LEVELS*

- **ST** - 43.7 dBA @ 900m³/h
- **SP** - 47.1 dBA @ 1600m³/h

**Motor and rangehood is installed as instructed within the installation manual at the correct distance in a controlled environment. For reference a standard onboard rangehood at Max Speed is 70 dBA @ 750m³/h. Equivalent to loud city traffic*

TECHNICAL DATA

UM1170-6S

- dimensions: (W x D) 598 x 295 mm
- 2 x mesh filters

UM1170-9S

- dimensions: (W x D) 898 x 295 mm
- 3 x mesh filters

UM1170-12S


- dimensions: (W x D) 1198 x 295 mm
- 4 x mesh filters



// UM1170-6S (60cm)



UM1170-6S, UM1170-6BS // Black or Stainless Steel // 60cm // SILENT

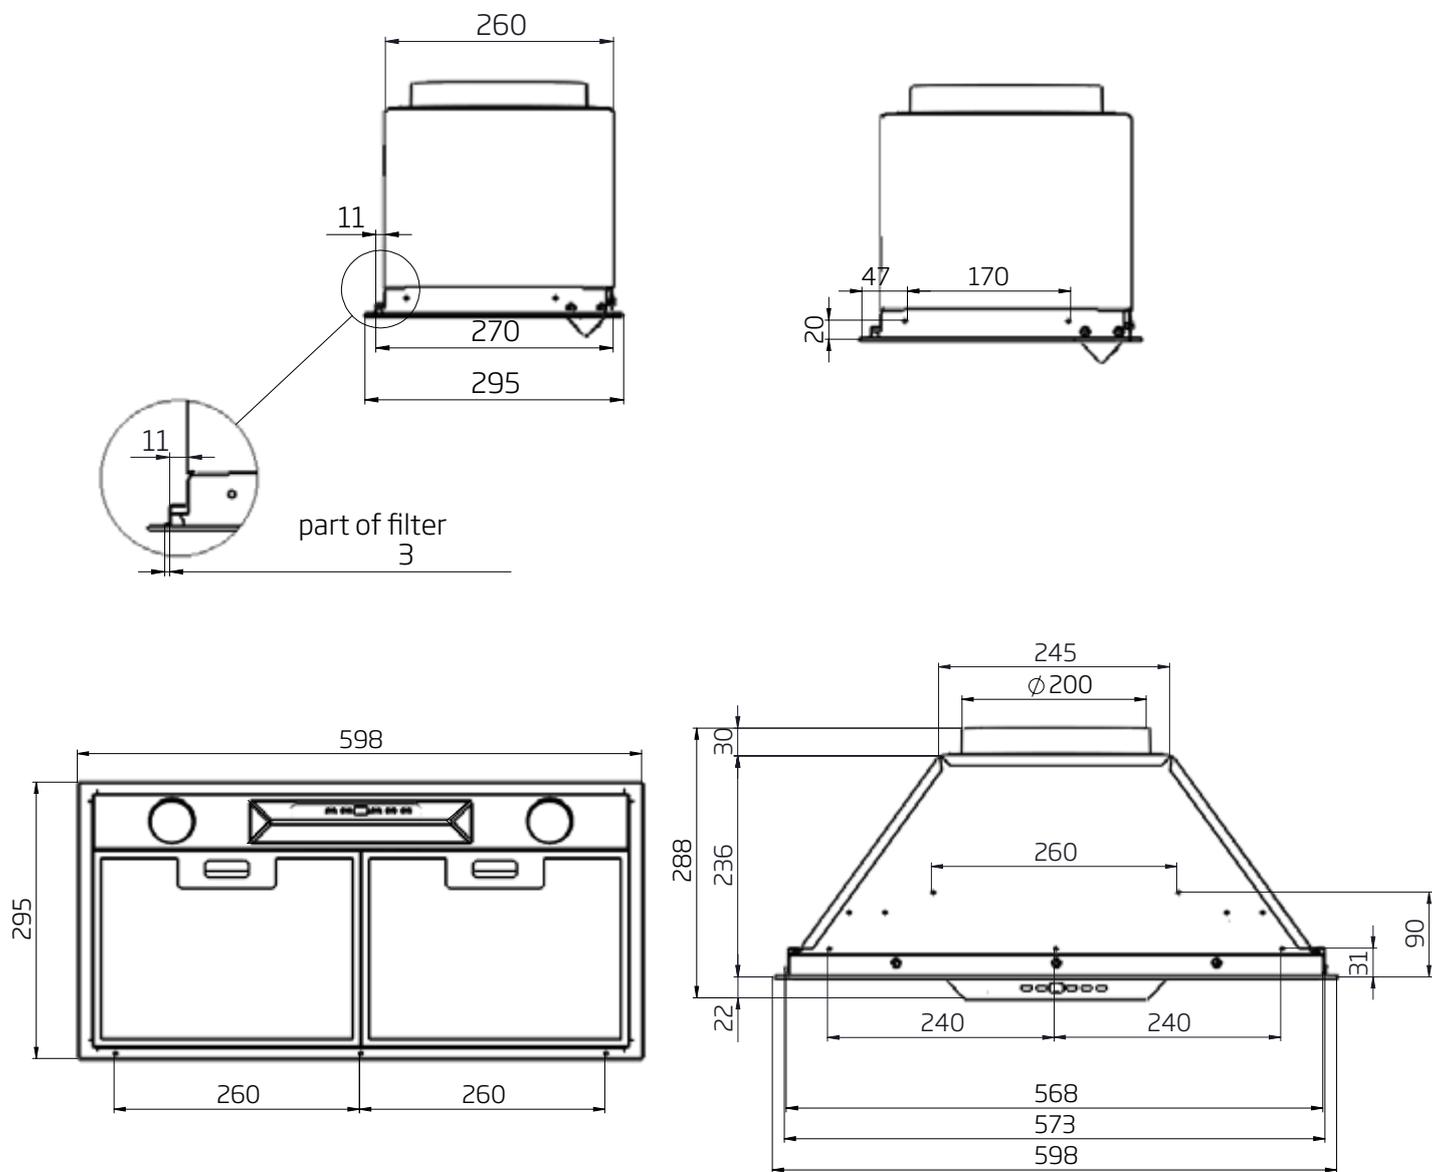

Model: UM1170-6S, UM1170-6BS

Feeding Voltage: 220-240V 50Hz

Max Lamp Power: 2 x 3W