# Stockholm 60



## Technical Specifications

### SPECIFICATIONS

| | |
|---|---|
| Model | X5S06S |
| Hood Mounting | Wall Mounted Canopy |

### DIMENSIONS

| | |
|---|---|
| Hood Width | 600mm |
| Hood Depth | 500mm |
| Hood Height (Fascia) | 75mm |

### SUITABILITY

| | |
|---|---|
| Cooking Surface Coverage (cm) | 60-75cm |
| Min Install Height | 650mm |
| Recommended Install Height | 700-750mm |
| Induction Suitable | • |

### FINISH

| | |
|---|---|
| **AISI304** 1.2mm Food Grade | • |

### FILTRATION

| | |
|---|---|
| Type: S-Flow Baffle | • |
| Filter Quantity | 2 |

### ELECTRONICS

| | |
|---|---|
| MasterMind | • |
| Controls | MasterMind Electronic |
| Wireless Remote | ○ |
| Speed Settings | 3 Speed + Boost Mode |
| Timer Function | Programmable Timer |
| Auto Fan Shut Off | 2-Hours Of Inactivity |

### LIGHTING

| | |
|---|---|
| Type: LED Warm White | • |
| Type: LED Cool White | ○ |
| Lamp Quality | 4 |
| Front Panel | • |
| Rear Panel | • |

### EXHAUST

| | |
|---|---|
| Outlet Position - Top | • |
| Outlet Position - Rear | ○ |
| Outlet Quantity | 1 |
| Ducting (Remote Motor) | Zilikon Duct 5M Supplied |
| Ducting (Onboard Motor) | Power Motor - Dia. 150mm |
| | Ultra Motor - Dia. 200mm |

### MODEL SELECTION

| | | | |
|---|---|---|---|
| **Remote** | Inline | Pro 1140m³/hr | X5S06S5.IP |
| | External | Pro 1140m³/hr | X5S06S5.EP |
| | External | Pro Plus 2010m³/hr | X5S06S5.EP |
| **On Board** | Top Duct | Power 1020m³/hr | X5S06S5.OP/T |
| | Rear Duct | Power 1020m³/hr | X5S06S5.OP/B |
| | Top Duct | Ultra 1680m³/hr | X5S06S6.OU/T |
| | Rear Duct | Ultra 1680m³/hr | X5S06S6.OU/B |


• Standard Inclusion ○ Optional - Not Available

5 YEAR WARRANTY COMPREHENSIVE PARTS & LABOUR

10 YEAR WARRANTY REPLACEMENT REMOTE FAN MOTOR


LIFETIME REPLACEMENT PARTS WARRANTY

### PRODUCT IMAGES

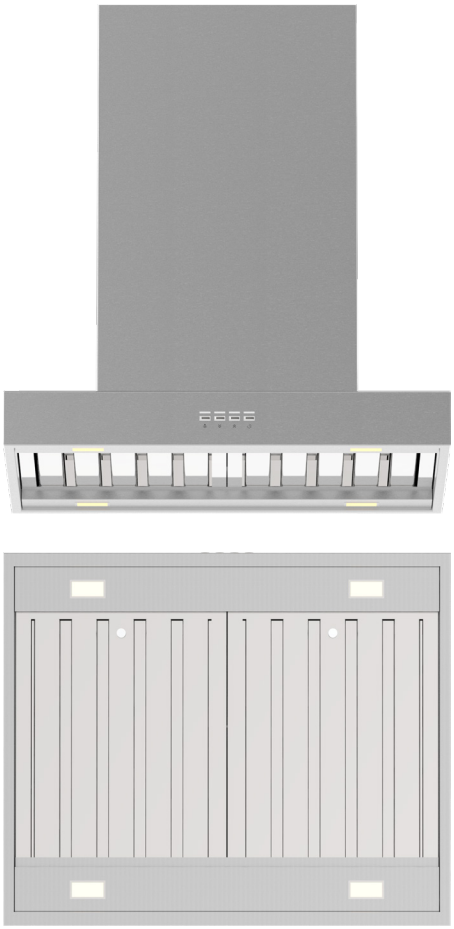

Filtration Zone.

### DIMENSIONED DRAWING

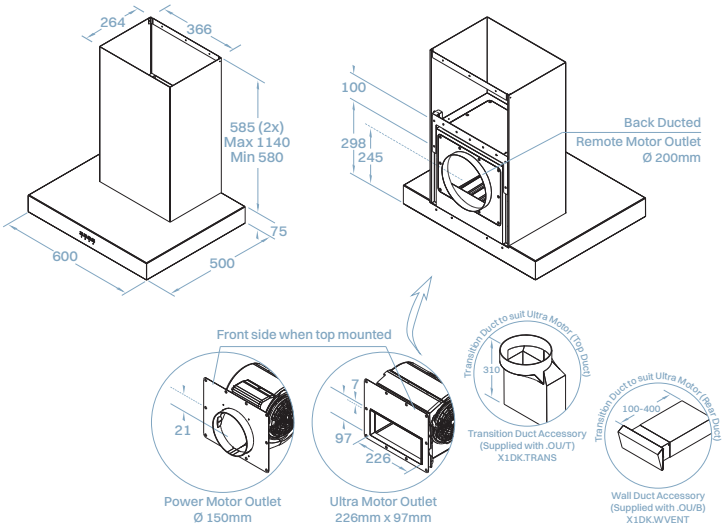


haus.

AU | 03 8593 9600 | www.whispair.com.au
NZ | 09 887 6959 | www.whispair.co.nz

whispair