


Silverdale with Rinse

AUSH.4866



MODEL	CODE
Silverdale with Rinse - Chrome	AUSH.4866CP
Silverdale with Rinse - Nickel	AUSH.4866NI
Silverdale with Rinse - Pewter	AUSH.4866PF
Silverdale with Rinse - English Bronze	AUSH.4866EB
Silverdale with Rinse - Satin Brass	AUSH.4866SB
Silverdale with Rinse - Polished Brass	AUSH.4866BR
Silverdale with Rinse - Gold (<i>special order</i>)	AUSH.4866IG

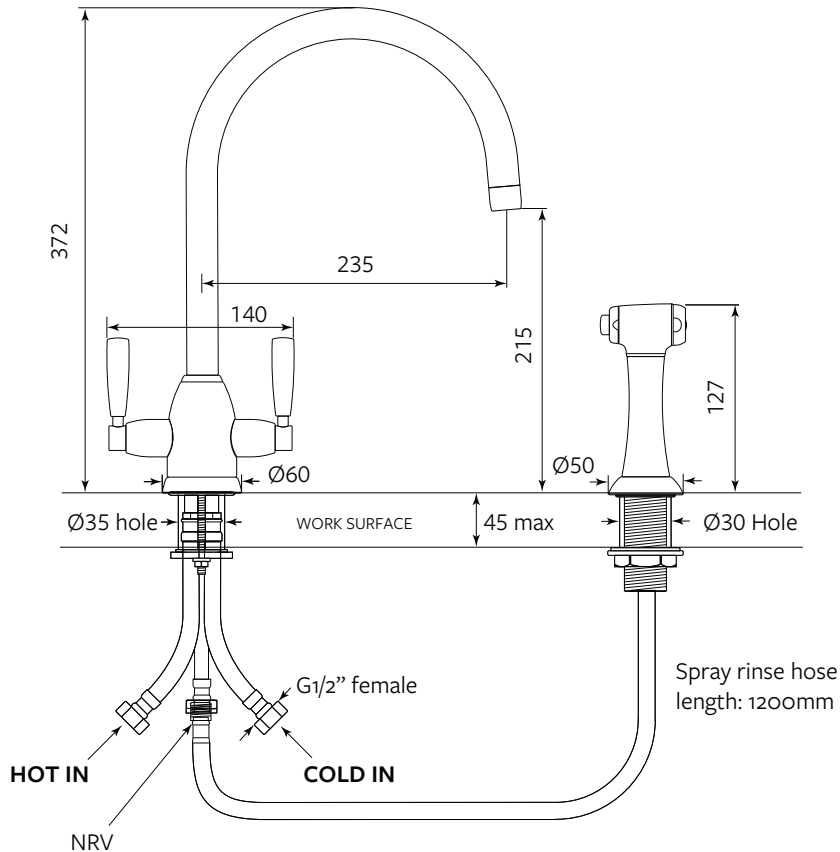

Also Available: Silverdale (AUSH.4861) non spray-rinse model.

Features include:

- Handcrafted in the United Kingdom using DZR brass
- Separate bench-mounted insulated spray rinse tap with 1.2m flexible hose
- Metal lever handles with engraved temperature indicators
- 1/4 turn German ceramic disc flow control
- Vernier insert for accurate handle alignment
- Supplied with dual check valve - Con-Serv DC 057
- 15 Year warranty. Please visit our website for individual finish warranties

Spray Rinse Requirements :

The spray rinse requires a minimum inlet water pressure of 100kPa, and a maximum of 500kPa to completely divert the water flow from the tap to the spray rinse.

Temperature range: Min 1°C. Max 70°C

Working Pressure: Min 1 Bar/15psi. Max 5 Bar/75psi

Packed Weight: 3.5kg

Flow Rates: 1 Bar: 6.2L/min

2 Bar: 9.4L/min

3 Bar: 12L/min

